


We'll help you meet the challenge of finding unique solutions to your most critical problems

## DP13 Tantalum Lead Seal

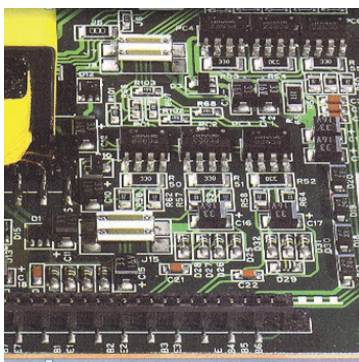

### COMPOSITION

Thickness(mm)	0.10
Thickness Tolerance (mm)	±0.025
Fluoropolymer Thickness (mm)	0.025
Melttable Fluoropolymer Thickness (mm)	0.076
Total Substance Weight (g/m <sup>2</sup> )	216

### PROPERTIES

Color	Cream
Melt Temperature (C°)	302-310



*Tests to determine application suitability should be made by each user.  
Electrolock can not guarantee performance in the user's application.  
Copyright 2014 Electrolock, Incorporated.  
Electrolock, Inc. is an ISO-9001-2008 certified company.*



[www.electrolock.com](http://www.electrolock.com)

### > Description

DP13 Tantalum Lead Seal is a unique two-sided fluoropolymer film engineered to assure a highly reliable anode seal in surface amount tantalum capacitors. The thin film thickness punches easily allowing capacitor manufacturers to form small diameter washers with a very low thickness profile. DP13 lead seal washers position easily and resist distortion during the oxidation process.

### > Availability

DP13 is supplied in 10mm wide rolls but can be slit to your required width in a wide variety of put ups.

### > For more information

For more information on this product or any other fine Electrolock products, please contact your nearest sales representative.

### > In China and Asia, contact:

**Admat Incorporated**  
[www.admatinc.com/contactus](http://www.admatinc.com/contactus)  
+1 (484) 322-2090