



We'll help you meet the challenge of finding unique solutions to your most critical problems

DP25 Tantalum Lead Seal

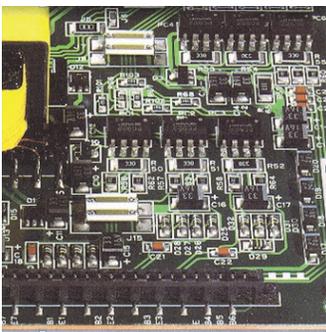

COMPOSITION	
Thickness (mm)	0.18
Thickness Tolerance (mm)	± 0.025
Fluoropolymer Thickness (mm)	0.05
Meltable Fluoropolymer Thickness (mm)	0.13
Total Substance Weight (mm)	375
PROPERTIES	
Metal Temperature (°C)	302-310
Peel Strength (oz/inch width)	16 minimum

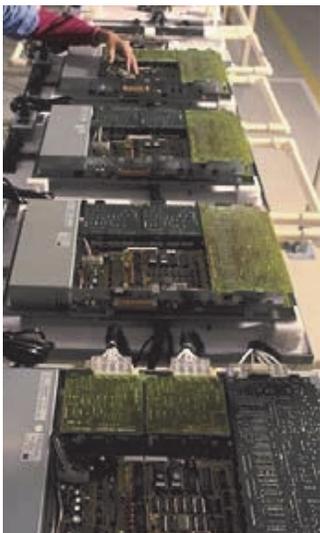

Tests to determine application suitability should be made by each user.
Electrolock can not guarantee performance in the user's application.
Copyright 2014 Electrolock, Incorporated.



www.electrolock.com

> Description

DP25 Tantalum Lead Seal is a unique two-sided fluoropolymer film engineered to assure a highly reliable anode seal in surface mount tantalum capacitors. The thin film thickness punches easily allowing capacitor manufacturers to form small diameter washers with a very low thickness profile. DP25 lead seal washers position easily and resist distortion during the oxidation process.

> Availability

DP25 is supplied in 0.375" wide rolls but can be slit to your required width in a wide variety of put ups.

> For more information

For more information on this product or any other fine Electrolock products, please contact your nearest sales representative.

> In Asia & China, contact:

Admat Incorporated
www.admatinc.com/contactus
+1 (484) 322-2090